


NE-RCD-GM GMW3097(2012)

Resistor-Capacitor-Diode Injection Network

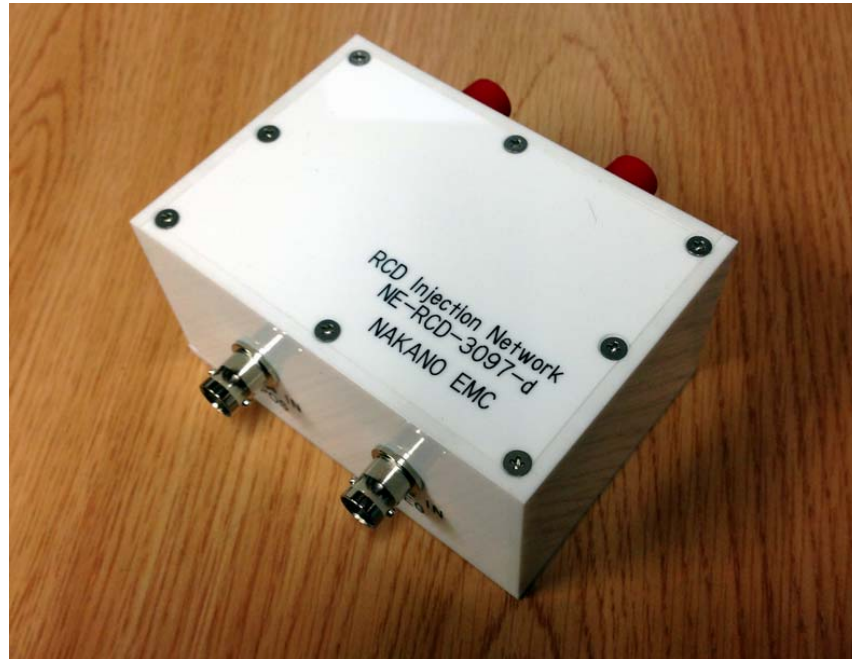

This Network support The GMW3097-2012 (3.5.4/3.5.5)
This Network requires a ISO-7637-2 Pulse 2a (e.g. NSG5500 teseq)

- INPUT Connector BNC (f)
- OUTPUT Connector Safety banana 4mm
- 100 × 75 × 50mm 200g

Including

- Housing(acrylic)
 - Schottky Diode 250V 40A Reverse Recovery Time 35ns
 - Capacitor (Murata Ceramic Capacitor) 0.1 μ F \pm 10% 630V
- Coaxial Cable BNC-BNC 40cm × 1
- Output Cable 4mm banana × 2

Nakano EMC Co.

1-3-22 Shioji Nishinari-Ku Osaka Japan

E-MAIL t.nakano@violin.ocn.ne.jp

Tel:+81 6-6656-4747

Fax:+81 6-6656-8155

Web:nakanoemc.com